



European Technical Approval ETA-08/0061

English translation prepared by DIBt - Original version in German language

Handelsbezeichnung <i>Trade name</i>	Injektionssystem fischer FIS VT <i>Injection System fischer FIS VT</i>
Zulassungsinhaber <i>Holder of approval</i>	fischerwerke GmbH & Co. KG Otto-Hahn-Straße 15 79211 Denzlingen DEUTSCHLAND
Zulassungsgegenstand und Verwendungszweck <i>Generic type and use of construction product</i>	Verbunddübel in den Größen M8 bis M30 zur Verankerung im ungerissenen Beton <i>Bonded anchor in the sizes of M8 to M30 for use in non-cracked concrete</i>
Geltungsdauer: <i>Validity:</i>	vom <i>from</i> bis <i>to</i> 30 October 2012 30 October 2017
Herstellwerk <i>Manufacturing plant</i>	fischerwerke

Diese Zulassung umfasst
This Approval contains

26 Seiten einschließlich 17 Anhänge
26 pages including 17 annexes

Diese Zulassung ersetzt
This Approval replaces

ETA-08/0061 mit Geltungsdauer vom 30.03.2009 bis 21.04.2013
ETA-08/0061 with validity from 30.03.2009 to 21.04.2013

I LEGAL BASES AND GENERAL CONDITIONS

- 1 This European technical approval is issued by Deutsches Institut für Bautechnik in accordance with:
 - Council Directive 89/106/EEC of 21 December 1988 on the approximation of laws, regulations and administrative provisions of Member States relating to construction products¹, modified by Council Directive 93/68/EEC² and Regulation (EC) N° 1882/2003 of the European Parliament and of the Council³;
 - *Gesetz über das In-Verkehr-Bringen von und den freien Warenverkehr mit Bauprodukten zur Umsetzung der Richtlinie 89/106/EWG des Rates vom 21. Dezember 1988 zur Angleichung der Rechts- und Verwaltungsvorschriften der Mitgliedstaaten über Bauprodukte und anderer Rechtsakte der Europäischen Gemeinschaften (Bauproduktengesetz - BauPG) vom 28. April 1998⁴, as amended by Article 2 of the law of 8 November 2011⁵;*
 - Common Procedural Rules for Requesting, Preparing and the Granting of European technical approvals set out in the Annex to Commission Decision 94/23/EC⁶;
 - Guideline for European technical approval of "Metal anchors for use in concrete - Part 5: Bonded anchors", ETAG 001-05.
- 2 Deutsches Institut für Bautechnik is authorized to check whether the provisions of this European technical approval are met. Checking may take place in the manufacturing plant. Nevertheless, the responsibility for the conformity of the products to the European technical approval and for their fitness for the intended use remains with the holder of the European technical approval.
- 3 This European technical approval is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1 of this European technical approval.
- 4 This European technical approval may be withdrawn by Deutsches Institut für Bautechnik, in particular pursuant to information by the Commission according to Article 5(1) of Council Directive 89/106/EEC.
- 5 Reproduction of this European technical approval including transmission by electronic means shall be in full. However, partial reproduction can be made with the written consent of Deutsches Institut für Bautechnik. In this case partial reproduction has to be designated as such. Texts and drawings of advertising brochures shall not contradict or misuse the European technical approval.
- 6 The European technical approval is issued by the approval body in its official language. This version corresponds fully to the version circulated within EOTA. Translations into other languages have to be designated as such.

¹ Official Journal of the European Communities L 40, 11 February 1989, p. 12
² Official Journal of the European Communities L 220, 30 August 1993, p. 1
³ Official Journal of the European Union L 284, 31 October 2003, p. 25
⁴ *Bundesgesetzblatt Teil I 1998*, p. 812
⁵ *Bundesgesetzblatt Teil I 2011*, p. 2178
⁶ Official Journal of the European Communities L 17, 20 January 1994, p. 34

II SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL APPROVAL

1 Definition of the product and intended use

1.1 Definition of the construction product

The Injection system fischer FIS VT is a bonded anchor (injection type) consisting of a mortar cartridge with fischer injection mortar fischer FIS VT, FIS VT Low Speed or FIS VT High Speed and a steel element. The steel elements are either

- fischer anchor rods in the range of M8 to M30 or
- fischer internal threaded anchor RG MI in the range of M8 to M20 or

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between steel element, injection mortar and concrete.

An illustration of the product and intended use is given in Annexes 1 and 2.

1.2 Intended use

The anchor is intended to be used for anchorages for which requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 of Council Directive 89/106 EEC shall be fulfilled and failure of anchorages made with these products would cause risk to human life and/or lead to considerable economic consequences. Safety in case of fire (Essential Requirement 2) is not covered in this European technical approval. The anchor is to be used only for anchorages subject to static or quasi-static loading in reinforced or unreinforced normal weight concrete of strength classes C20/25 at minimum and C50/60 at most according to EN 206:2000-12.

The anchor may be used in non-cracked concrete only.

The anchor may be installed in dry or wet concrete. The internal threaded anchor RG MI and the fischer-anchor rod in the range of M12 to M30 with coaxial cartridges of sizes 380 ml, 400 ml and 410 ml may be installed in flooded holes excepting sea water.

The drill hole shall be made by hammer drilling or compressed air drilling.

The anchor may be used in the following service temperature ranges:

Temperature range I:	-40 °C to +80 °C	(max long term temperature +50 °C and max short term temperature +80 °C)
Temperature range II:	-40 °C to +120 °C	(max long term temperature +72 °C and

max short term temperature +120 °C)

Elements made of zinc coated steel:

The element made of electroplated or hot-dipped galvanised steel may only be used in structures subject to dry internal conditions.

Elements made of stainless steel A4:

The element made of stainless steel may be used in structures subject to dry internal conditions and also in structures subject to external atmospheric exposure (including industrial and marine environment), or exposure in permanently damp internal conditions, if no particular aggressive conditions exist. Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Elements made of high corrosion resistant steel C:

The element made of high corrosion resistant steel may be used in structures subject to dry internal conditions and also in structures subject to external atmospheric exposure, in permanently damp internal conditions or in other particular aggressive conditions. Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

The provisions made in this European technical approval are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

2 Characteristics of the product and methods of verification

2.1 Characteristics of product

The anchor corresponds to the drawings and provisions given in Annexes 1 to 7. The characteristic material values, dimensions and tolerances of the anchor not indicated in Annexes 1 to 7 shall correspond to the respective values laid down in the technical documentation⁷ of this European technical approval.

The characteristic anchor values for the design of anchorages are given in Annexes 10 to 29.

The two components of the fischer injection mortar FIS VT, FIS VT Low Speed or FIS VT High Speed are delivered in unmixed condition in shuttle cartridges or in coaxial cartridges according to Annex 1. Each cartridge is marked with the imprint "fischer FIS VT", "fischer FIS VT High Speed" or "fischer FIS VT Low Speed" with processing notes, shelf life, curing time, processing time (depending on temperature), hazard code.

Each fischer anchor rod is marked with the property class in accordance with Annex 3.

Each fischer internal threaded anchor RG MI is marked with the marking of steel grade and length in accordance with Annex 4. Each fischer internal threaded anchor RG MI made of stainless steel is marked with the additional letter "A4". Each fischer internal threaded anchor RG MI made of high corrosion resistant steel is marked with the additional letter "C".

The marking of embedment depth may be done on jobsite.

2.2 Methods of verification

The assessment of fitness of the anchor for the intended use in relation to the requirements for mechanical resistance and stability and safety in use in the sense of the Essential Requirements 1 and 4 has been made in accordance with the "Guideline for European technical approval of Metal Anchors for use in concrete", Part 1 "Anchors in general" and Part 5 "Bonded anchors" on the basis of Option 7.

In addition to the specific clauses relating to dangerous substances contained in this European technical approval, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Directive, these requirements need also to be complied with, when and where they apply.

⁷ The technical documentation of this European technical approval is deposited at the Deutsches Institut für Bautechnik and, as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure, is handed over to the approved bodies.

3 Evaluation and attestation of conformity and CE marking

3.1 System of attestation of conformity

According to the Decision 96/582/EG of the European Commission⁸ system 2(i) (referred to as System 1) of the attestation of conformity applies.

This system of attestation of conformity is defined as follows:

System 1: Certification of the conformity of the product by an approved certification body on the basis of:

- (a) Tasks for the manufacturer:
 - (1) factory production control;
 - (2) further testing of samples taken at the factory by the manufacturer in accordance with a prescribed control plan;
- (b) Tasks for the approved body:
 - (3) initial type-testing of the product;
 - (4) initial inspection of factory and of factory production control;
 - (5) continuous surveillance, assessment and approval of factory production control.

Note: Approved bodies are also referred to as "notified bodies".

3.2 Responsibilities

3.2.1 Tasks for the manufacturer

3.2.1.1 Factory production control

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall insure that the product is in conformity with this European technical approval.

The manufacturer may only use initial/raw/constituent materials stated in the technical documentation of this European technical approval.

The factory production control shall be in accordance with the control plan which is part of the technical documentation of this European technical approval. The control plan is laid down in the context of the factory production control system operated by the manufacturer and deposited with Deutsches Institut für Bautechnik.⁹

The results of factory production control shall be recorded and evaluated in accordance with the provisions of the control plan.

3.2.1.2 Other tasks for the manufacturer

The manufacturer shall, on the basis of a contract, involve a body which is approved for the tasks referred to in section 3.1 in the field of anchors in order to undertake the actions laid down in section 3.2.2 For this purpose, the control plan referred to in sections 3.2.1.1 and 3.2.2 shall be handed over by the manufacturer to the approved body involved.

The manufacturer shall make a declaration of conformity, stating that the construction product is in conformity with the provisions of this European technical approval.

⁸ Official Journal of the European Communities L 254 of 08.10.1996

⁹ The control plan is a confidential part of the European technical approval and only handed over to the approved body involved in the procedure of attestation of conformity. See section 3.2.2.

3.2.2 Tasks for the approved bodies

The approved body shall perform the

- initial type-testing of the product,
- initial inspection of factory and of factory production control,
- continuous surveillance, assessment and approval of factory production control,

in accordance with the provisions laid down in the control plan.

The approved body shall retain the essential points of its actions referred to above and state the results obtained and conclusions drawn in a written report.

The approved certification body involved by the manufacturer shall issue an EC certificate of conformity of the product stating the conformity with the provisions of this European technical approval.

In cases where the provisions of the European technical approval and its control plan are no longer fulfilled the certification body shall withdraw the certificate of conformity and inform Deutsches Institut für Bautechnik without delay.

3.3 CE marking

The CE marking shall be affixed on each packaging of the anchor. The letters "CE" shall be followed by the identification number of the approved certification body, where relevant, and be accompanied by the following additional information:

- the name and address of the producer (legal entity responsible for the manufacture),
- the last two digits of the year in which the CE marking was affixed,
- the number of the EC certificate of conformity for the product,
- the number of the European technical approval,
- the number of the guideline for European technical approval,
- use category (ETAG 001-1, Option 7),
- size.

4 Assumptions under which the fitness of the product for the intended use was favourably assessed

4.1 Manufacturing

The European technical approval is issued for the product on the basis of agreed data/information, deposited with Deutsches Institut für Bautechnik, which identifies the product that has been assessed and judged. Changes to the product or production process, which could result in this deposited data/information being incorrect, should be notified to Deutsches Institut für Bautechnik before the changes are introduced. Deutsches Institut für Bautechnik will decide whether or not such changes affect the approval and consequently the validity of the CE marking on the basis of the approval and if so whether further assessment or alterations to the approval shall be necessary.

4.2 Design of anchorages

The fitness of the anchor for the intended use is given under the following conditions:

The anchorages are designed in accordance with the

- EOTA Technical Report TR 029 "Design of bonded anchors"¹⁰
or in accordance with the
- CEN/TS 1992-4-5 "Design of fastenings for use in concrete", Part 4-5: "Post-installed fasteners - Chemical systems",

under the responsibility of an engineer experienced in anchorages and concrete work.

For the Fischer internal threaded anchor RG MI fastening screws or threaded rods made of appropriate steel and strength class acc. to Annex 5 shall be specified. The minimum and maximum thread engagement length l_E of the fastening screw or the threaded rod for installation of the fixture shall be met the requirements according to Annex 4, Table 3. The length of the fastening screw or the threaded rod shall be determined depending on thickness of fixture, admissible tolerances, available thread length and minimum and maximum thread engagement length l_E .

Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored.

The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).

4.3 Installation of anchors

The fitness for use of the anchor can only be assumed if the anchor is installed as follows:

- anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site,
- use of the anchor only as supplied by the manufacturer without exchanging the components of an anchor,
- anchor installation in accordance with the manufacturer's specifications and drawings using the tools indicated in the technical documentation of this European technical approval,
- commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:
 - material, dimensions and mechanical properties of the metal parts according to the specifications given in Annex 5, Table 4,
 - confirmation of material and mechanical properties of the metal parts by inspection certificate 3.1 according to EN 10204:2004, the documents should be stored,
 - marking of the threaded rod with the envisage embedment depth. This may be done by the manufacturer of the rod or the person on jobsite.
- checks before placing the anchor to ensure that the strength class of the concrete in which the anchor is to be placed is in the range given and is not lower than that of the concrete to which the characteristic loads apply,
- check of concrete being well compacted, e.g. without significant voids,
- marking and keeping the effective anchorage depth,
- edge distance and spacing not less than the specified values without minus tolerances,
- positioning of the drill holes without damaging the reinforcement,
- drilling by hammer drilling or compressed air drilling,
- in case of aborted drill hole: the drill hole shall be filled with mortar,

¹⁰ The Technical Report TR 029 "Design of Bonded Anchors" is published in English on EOTA website www.eota.eu.

- The anchor may be installed in dry or wet concrete. The internal threaded anchor RG MI and the fischer-anchor rod in the range of M12 to M30 with coaxial cartridges of sizes 380 ml, 400 ml and 410 ml may be installed in flooded holes excepting sea water,
- cleaning the drill hole and installation in accordance with Annexes 6 and 7,
- the anchor component installation temperature shall be at least 0 °C (fischer FIS VT High Speed) and +5 °C (FIS VT and FIS VT Low Speed); during curing of the chemical mortar the temperature of the concrete must not fall below -5 °C (fischer FIS VT, FIS VT High Speed) and 0 °C (FIS VT Low Speed); observing the curing time according to Annex 5, Table 4 until the anchor may be loaded,
- fastening screws or threaded rods (including nut and washer) for the internal threaded anchor must be made of appropriate steel grade and property class,
- installation torque moments are not required for functioning of the anchor. However, the torque moments given in Annex 3 and 4 must not be exceeded.

5 Indications to the manufacture

5.1 Responsibility of the manufacturer

It is in the responsibility of the manufacturer to ensure that the information on the specific conditions according to 1 and 2 including Annexes referred to as well as sections 4.2, 4.3 and 5.2 is given to those who are concerned. This information may be made by reproduction of the respective parts of the European technical approval. In addition all installation data shall be shown clearly on the package and/or on an enclosed instruction sheet, preferably using illustration(s).

The minimum data required are:

- drill bit,
- hole depth,
- diameter of anchor rod,
- minimum effective anchorage depth,
- information on the installation procedure, including cleaning of the hole with the cleaning equipments, preferably by means of an illustration,
- anchor component installation temperature,
- material and property class of metal parts acc. to Annex 5, Table 4,
- ambient temperature of the concrete during installation of the anchor,
- admissible processing time (open time) of a cartridge,
- curing time until the anchor may be loaded as a function of the ambient temperature in the concrete during installation,
- maximum torque moment,
- identification of the manufacturing batch.

All data shall be presented in a clear and explicit form.

European technical approval

ETA-08/0061

English translation prepared by DIBt

Page 9 of 26 | 30 October 2012

5.2 Recommendations concerning packaging, transport and storage

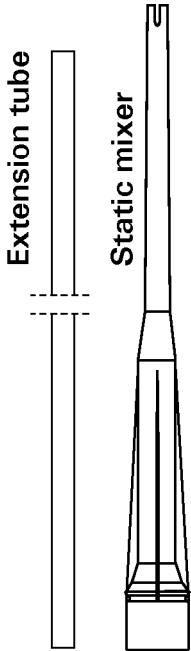
The injection cartridges shall be protected against sun radiation and shall be stored according to the manufacture's installation instructions in dry condition at temperatures of at least +5 °C to not more than +25 °C.

Mortar cartridges with expired shelf life must no longer be used.

The anchor shall only be packaged and supplied as a complete unit. Mortar cartridges may be packed separately from metal parts.

Georg Feistel
Head of Department

beglaubigt:
Baderschneider



Shuttle cartridge

(Sizes: 345 ml; 360 ml; 390 ml; 950 ml; 1100 ml; 1500 ml)

Sealing cap

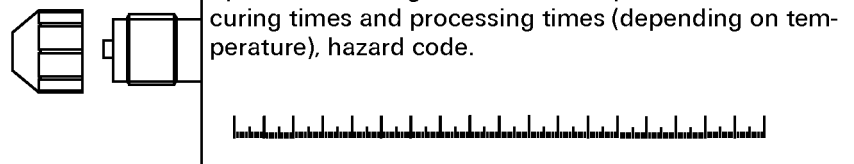


Imprint: fischer FIS VT Low Speed, FIS VT, FIS VT High Speed. Processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code.

Coaxial cartridge

(Sizes: 100 ml; 150 ml; 300 ml; 380 ml; 400 ml; 410 ml)


Sealing cap




Imprint: fischer FIS VT Low Speed, FIS VT, FIS VT High Speed. Processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code.

fischer anchor rod

Size: M8, M10, M12, M16, M20, M24, M30



Washer




Hexagon nut




fischer internal threaded anchor RG MI

Size: M8, M10, M12, M16, M20



Screw



threaded rod



Washer



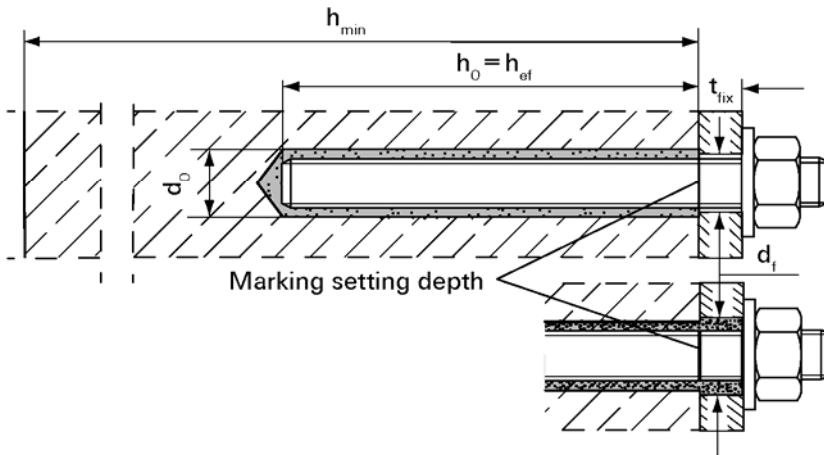
Hexagon nut



Injection system fischer FIS VT

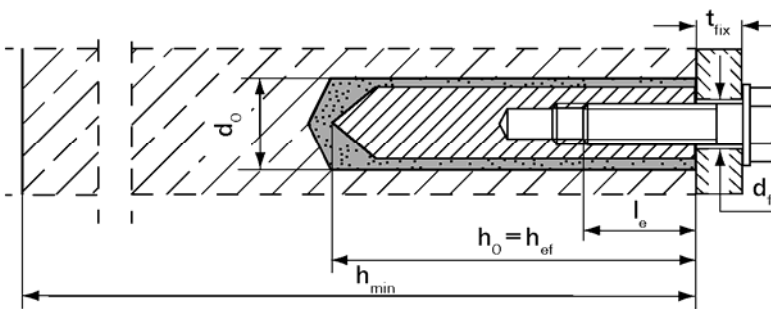
Product

Annex 1



fischer anchor rod
Pre-positioned anchorage

push-through anchorage
(annular clearance filled
with mortar)



**fischer internal threaded anchor
RG MI**
Only pre-positioned anchorage

Table 1: Application range and intended use

	max. long term temperature	max. short term temperature	
Temperature range I: -40°C to +80°C	+50°C	+80°C	
Temperature range II: -40°C to +120°C	+72°C	+120°C	
Intended use	dry concrete	wet concrete	flooded hole ¹⁾
Anchor rods	M8 – M30		M12 – M30
Internal threaded anchors RG MI	M8 – M20		

¹⁾ Only coaxial cartridges 380 ml, 400 ml and 410 ml.

Injection system fischer FIS VT

Intended use
Application range, temperature ranges

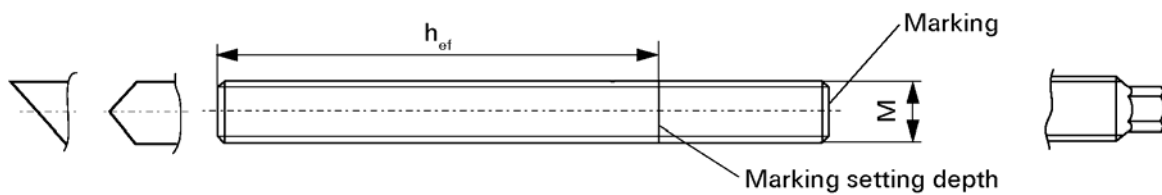
Annex 2

Table 2: Installation parameters fischer anchor rods

Size of anchor	[-]	M8	M10	M12	M16	M20	M24	M30
Nominal drill bit diameter	d_o [mm]	10	12	14	18	24	28	35
Drill hole depth	h_o [mm]	$h_o = h_{ef}$						
Effective anchorage depth	$h_{ef,min}$ [mm]	64	80	96	128	160	192	240
	$h_{ef,max}$ [mm]	96	120	144	192	240	288	360
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$ [mm]	40	45	55	65	85	105	140
Diameter of clearance hole in the fixture ¹⁾	pre-positioned anchorage d_f [mm]	9	12	14	18	22	26	33
	push-through anchorage d_f [mm]	11	14	16	20	26	30	40
Minimum thickness of concrete member	h_{min} [mm]	$h_{ef} + 30 (\geq 100)$			$h_{ef} + 2d_o$			
Maximum torque moment	$T_{inst,max}$ [Nm]	10	20	40	60	120	150	300
Thickness of fixture	$t_{fix,min}$ [mm]	0						
	$t_{fix,max}$ [mm]	3000						

¹⁾For bigger clearance holes in fixture see chapter 1.1 of the TR 029.

fischer anchor rod



Marking:

- Property class 8.8 or high corrosion-resistant steel C, property class 80: •
- Stainless steel A4, and high corrosion-resistant steel C, property class 50: ••

Injection system fischer FIS VT

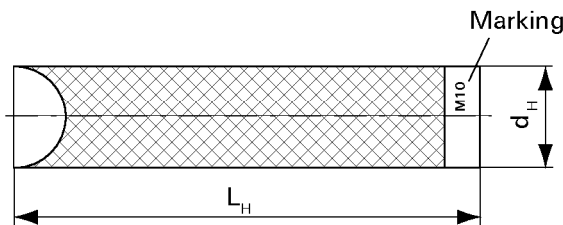
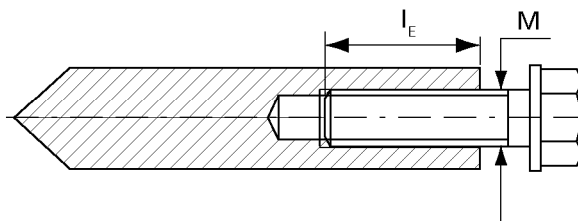
fischer anchor rods
Installation parameters and dimensions

Annex 3

Table 3: Installation parameters for fischer internal threaded anchors RG MI

Size of anchor		M8	M10	M12	M16	M20
Diameter of anchor	d_H [mm]	12	16	18	22	28
Nominal drill bit diameter	d_o [mm]	14	18	20	24	32
Length of anchor	L_H [mm]	90	90	125	160	200
Effective anchorage depth h_{ef} and drill hole depth h_o	$h_{ef} = h_o$ [mm]	90	90	125	160	200
Minimum spacing and edge distance	$s_{min} = c_{min}$ [mm]	55	65	75	95	125
Diameter of clearance hole in the fixture	d_f [mm]	9	12	14	18	22
Minimum thickness of concrete member	h_{min} [mm]	120	125	165	205	260
Screw-in depth	$l_{E,min}$ [mm]	8	10	12	16	20
	$l_{E,max}$ [mm]	18	23	26	35	45
Maximum troque moment	$T_{inst,max}$ [Nm]	10	20	40	80	120

fischer internal threaded anchor RG MI



Marking: anchor size

e.g.: **M10**

Stainless steel additional A4

e.g.: **M10 A4**

High corrosion-resistant steel additional C

e.g.: **M10 C**

Injection system fischer FIS VT

fischer internal threaded anchors RG MI
Installation parameters and dimensions

Annex 4

Table 4: Materials: anchor rods, threaded rods, washers, hexagon nuts and screws

Designation	Materials		
	Steel, zinc plated	Stainless steel A4	high corrosion-resistant steel C
anchor rod	Property class 5.8 or 8.8; EN ISO 898-1 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042 A2K or hot-dip galvanised EN ISO 10684 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$	Property class 50, 70 or 80 EN ISO 3506 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088 or 1.4062 pr EN 10088:2011 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$	Property class 50 or 80 EN ISO 3506 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$
Washer EN ISO 7089	zinc plated $\geq 5\mu\text{m}$, EN ISO 4042 A2K or hot-dip galvanised EN ISO 10684	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088	1.4565; 1.4529 EN 10088
Hexagon nut according to EN ISO 4032	Property class 5 or 8; EN ISO 898-2 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042 A2K or hot-dip galvanised EN ISO 10684	Property class 50, 70 or 80 EN ISO 3506 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088	Property class 50, 70 or 80 EN ISO 3506 1.4565; 1.4529 EN 10088
Screw or threaded rods for internal- threaded anchors RG MI	Property class 5.8 or 8.8; EN ISO 898-1 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042 A2K or hot-dip galvanised EN ISO 10684	Property class 70 EN ISO 3506 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088	Property class 70 EN ISO 3506-1 1.4565; 1.4529 EN 10088

Table 5: Maximum processing time of the mortar and minimum curing time

(During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature).

Temperature at anchoring base [°C]	Minimum curing time ¹⁾ t_{cure} [minutes]			System- temperature (mortar) [°C]	Maximum processing time t_{work} [minutes]		
	FIS VT High Speed	FIS VT	FIS VT Low Speed		FIS VT High Speed	FIS VT	FIS VT Low Speed
-5 to ± 0	3 hours	24 hours	—	0	5	—	—
$\geq \pm 0$ to +5	3 hours	3 hours	6 hours	+ 5	5	13	—
$> +5$ to +10	50	90	3 hours	+ 10	3	9	20
$> +10$ to +20	30	60	2 hours	+ 20	1	5	10
$> +20$ to +30	—	45	60	+ 30	—	4	6
$> +30$ to +40	—	35	30	+ 40	—	2	4


¹⁾For wet concrete the curing time must be doubled.


Injection system fischer FIS VT


Materials
Processing time and curing time


Annex 5



Drilling and cleaning the hole


1  Drill the hole.
Drill hole diameter d_0 and drill hole depth h_0
see Table 1.


2  $d_0 < 18\text{mm}$:
Blow out the drill hole
four times
by hand. **4x**

 $d_0 \geq 18\text{mm}$:
Blow out the drill hole
four times, using oil-free
pressure air ($p > 6\text{ bar}$). **4x**


3  Brush the drill hole four times using a adequate steel brush and a drill machine. For deep drill holes use an extension. **4x**


	d_0 [mm]	10	12	14	18	20	24	28	32	35
	d_b [mm]	11	14	16	20	25	26	30	40	40

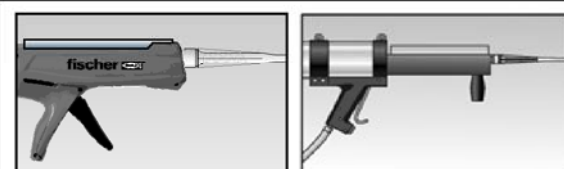
4  $d_0 < 18\text{mm}$:
Blow out the drill hole
four times
by hand. **4x**


 $d_0 \geq 18\text{mm}$:
Blow out the drill hole
four times, using oil-free
pressure air ($p > 6\text{ bar}$). **4x**

Preparing the cartridge

5  Twist off the sealing cap.

6  Twist on the static mixer
(the spiral in the static
mixer must be clearly
visible).

7  Place the cartridge into
the dispenser.



8  Press out approx. 10 cm of mortar
until the resin is permanent grey in colour.
Don't use uniformly grey unreal mortar.

Injection system fischer FIS VT

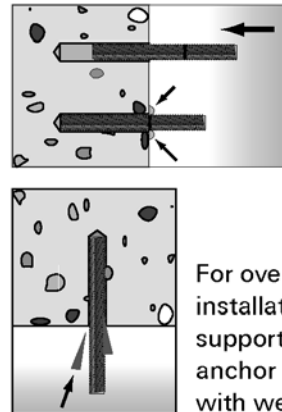

Installation instructions
Part 1


Annex 6

Injection of the mortar

9		<p>Fill approx. 2/3 of the drill hole with mortar. Always begin from the bottom of the hole to eliminate voids.</p>		<p>For drill hole depth ≥ 150 mm use an extension tube.</p>
----------	---	---	--	---

Installation fischer anchor rods or internal threaded anchors RG MI

10		<p>Only use clean and oil-free anchor elements. Mark the anchor element for setting depth. Press the anchor rod or internal threaded anchor down to the bottom of the hole, turning it slightly while doing so. After inserting the anchor element, excess mortar must emerge around the anchor element.</p>	<p>For overhead installation support the anchor rod with wedges.</p>		<p>For push-through installation fill the annular gap with mortar.</p>
-----------	--	--	--	--	--

11		<p>Wait for the specified curing time. t_{cure} see Table 5.</p>
-----------	---	--

12		<p>Mounting the fixture $T_{\text{inst,max}}$ see Table 1 or 2.</p>
-----------	---	--

Injection system fischer FIS VT

Installation instructions
Part 2

Annex 7

Table 6: Design of Bonded Anchors acc. to TR 029
Characteristic values to tension load fischer anchor rods

Size		M 8	M 10	M 12	M 16	M 20	M 24	M 30		
Steel failure										
Characteristic resistance $N_{Rk,s}$	Property class	5.8 [kN]	19	29	43	79	123	177	281	
		8.8 [kN]	30	47	68	126	196	282	449	
	stainless steel A4 and steel C	Property class	50 [kN]	19	29	43	79	123	177	281
			70 [kN]	26	41	59	110	172	247	393
		80 [kN]	30	47	68	126	196	282	449	
Partial safety factor $\gamma_{Ms,N}$ ¹⁾	Property class	5.8 [-]	1,50							
		8.8 [-]	1,50							
	stainless steel A4 and steel C	Property class	50 [-]	2,86						
			70 [-]	1,50 ³⁾ / 1,87						
		80 [-]	1,60							
Combined pullout and concrete cone failure										
Diameter of calculation	d [mm]	8	10	12	16	20	24	30		
Characteristic bond resistance in concrete C20/25. Intended use: dry and wet concrete										
Temperature range I ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	11,0	11,0	11,0	10,0	9,5	9,0	8,5		
Temperature range II ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	9,5	9,5	9,0	8,5	8,0	7,5	7,0		
Characteristic bond resistance in concrete C20/25. Intended use: flooded hole										
Temperature range I ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	—	—	9,5	8,5	8,0	7,5	7,0		
Temperature range II ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	—	—	7,5	7,0	6,5	6,0	6,0		
Increasing factors for $\tau_{Rk,ucr}$	ψ_c	C25/30 [-]	1,05							
		C30/37 [-]	1,10							
		C35/45 [-]	1,15							
		C40/50 [-]	1,19							
		C45/55 [-]	1,22							
		C50/60 [-]	1,26							
Splitting failure										
Edge distance $c_{cr,sp}$ [mm]	$h / h_{ef} \geq 2,0$	1,0 h_{ef}								
	$2,0 > h / h_{ef} > 1,3$	4,6 h_{ef} - 1,8 h								
	$h / h_{ef} \leq 1,3$	2,26 h_{ef}								
Spacing	$s_{cr,sp}$ [mm]	2 $c_{cr,sp}$								
Partial safety factor	$\gamma_{Mp} = \gamma_{Mc} = \gamma_{Msp}$ ¹⁾ [-]	1,8 ²⁾								

¹⁾ In absence of other national regulations

²⁾ The partial safety factor $\gamma_2 = 1,2$ is included.

³⁾ For steel C: $f_{yk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

⁴⁾ See Annex 2.

Injection system fischer FIS VT

Design of Bonded Anchors acc. to TR 029
fischer anchor rods
Characteristic values to tension load

Annex 8

Table 7: Design of Bonded Anchors acc. to TR 029
Characteristic values to shear load fisher anchor rods

Size		M8	M10	M12	M16	M20	M24	M30		
Steel failure without lever arm										
Characteristic resistance $V_{Rk,s}$	Property class	5.8 [kN]	9	15	21	39	61	89	141	
		8.8 [kN]	15	23	34	63	98	141	225	
	stainless steel A4 and steel C	Property class	50 [kN]	9	15	21	39	61	89	141
			70 [kN]	13	20	30	55	86	124	197
		80 [kN]	15	23	34	63	98	141	225	
Steel failure with lever arm										
Characteristic bending moment $M_{Rk,s}^0$	Property class	5.8 [Nm]	19	37	65	166	324	561	1124	
		8.8 [Nm]	30	60	105	266	519	898	1799	
	stainless steel A4 and steel C	Property class	50 [Nm]	19	37	65	166	324	561	1124
			70 [Nm]	26	52	92	233	454	785	1574
		80 [Nm]	30	60	105	266	519	898	1799	
Partial safety factor steel failure										
$\gamma_{Ms,V}^{1)}$	Property class	5.8 [-]	1,25							
		8.8 [-]	1,25							
	stainless steel A4 and steel C	Property class	50 [-]	2,38						
			70 [-]	1,25 ³⁾ / 1,56						
		80 [-]	1,33							
Concrete pryout failure										
Factor k in Equation (5.7) of Technical Report TR 029 Section 5.2.3.3		k [-]	2,0							
Partial safety failure		$\gamma_{Mcp}^{1)}$ [-]	1,5 ²⁾							
Concrete edge failure										
Partial safety failure		$\gamma_{Mc}^{1)}$ [-]	1,5 ²⁾							

¹⁾ In absence of other national regulations.

²⁾ The partial safety factor $\gamma_2 = 1,0$ is included.

³⁾ For steel C: $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

Injection system fisher FIS VT

Design of Bonded Anchors acc. to TR 029
fisher anchor rods
Characteristic values to shear load

Annex 9

Table 8: Displacements of fischer anchor rods to tension load

Size		M8	M10	M12	M16	M20	M24	M30
Temperature range I -40°C / +80°C		Effective anchorage depth $h_{ef} = 8 d^{1)}$						
Tension load	N [kN]	7,7	11,0	15,8	25,5	37,9	51,7	76,3
Displacement	δ_{NO} [mm]	0,2	0,2	0,2	0,2	0,3	0,3	0,3
Displacement	$\delta_{N\infty}$ [mm]	0,6	0,6	0,6	0,6	0,9	0,9	0,9
Temperature range II -40°C / +120°C		Effective anchorage depth $h_{ef} = 8 d^{1)}$						
Tension load	N [kN]	6,4	9,5	12,9	21,7	31,9	43,1	62,8
Displacement	δ_{NO} [mm]	0,15	0,15	0,15	0,15	0,25	0,25	0,25
Displacement	$\delta_{N\infty}$ [mm]	0,45	0,45	0,45	0,45	0,75	0,75	0,75

¹⁾ Values for $8d \leq h_{ef} \leq 20d$
can be calculated:

$$\delta_{NO} = \delta_{NO1} \frac{h_{ef}}{8d}$$

δ_{NO1} for $h_{ef} \geq 8d$

$$\delta_{N\infty} = \delta_{N\infty1} \frac{h_{ef}}{8d}$$

$\delta_{N\infty1}$ for $h_{ef} \geq 8d$

Table 9: Displacements of fischer anchor rods to shear load

Size		M8	M10	M12	M16	M20	M24	M30
Temperature range I -40°C / + 80°C and temperature range II -40°C / +120°C								
Property class 5.8 / A4-50 / C-50								
Shear load	V [kN]	5,1	8,1	11,8	21,9	34,2	49,1	78,3
Displacement	δ_{V0} [mm]	0,9	1,2	1,4	2,0	2,4	2,6	3,7
Displacement	$\delta_{V\infty}$ [mm]	1,4	1,7	2,1	2,9	3,7	4,1	5,6
Property class A4-70								
Shear load	V [kN]	5,9	9,3	13,5	25,2	39,3	56,4	89,9
Displacement	δ_{V0} [mm]	1,0	1,3	1,6	2,2	2,8	3,4	4,3
Displacement	$\delta_{V\infty}$ [mm]	1,6	2,0	2,4	3,4	4,2	5,6	6,4
Property class C-70 ¹⁾								
Shear load	V [kN]	7,3	11,6	16,9	31,4	49,0	70,4	112,2
Displacement	δ_{V0} [mm]	1,3	1,7	2,0	2,8	3,5	4,2	5,3
Displacement	$\delta_{V\infty}$ [mm]	2,0	2,5	3,0	4,2	5,3	6,3	8,0
Property class 8.8 / A4-80 / C-80								
Shear load	V [kN]	7,0	11,1	15,2	30,1	47,0	67,7	107,7
Displacement	δ_{V0} [mm]	1,2	1,6	1,9	2,8	3,3	3,6	5,1
Displacement	$\delta_{V\infty}$ [mm]	1,9	2,3	2,9	4,0	5,1	5,6	7,7

¹⁾ $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

Injection system fischer FIS VT

fischer anchor rods
Displacements

Annex 10

Table 10: Design of Bonded Anchors acc. to TR 029
Characteristic values to tension load for fischer internal threaded anchors RG MI

Size		M 8	M 10	M 12	M 16	M 20		
Steel failure								
Characteristic resistance with screw	$N_{Rk,s}$	Property-class	5.8 [kN]	19	29	43	79	123
			8.8 [kN]	29	47	68	108	179
		Property-class	A4 [kN]	26	41	59	110	172
			C [kN]	26	41	59	110	172
Partial safety factor	$\gamma_{Ms,N}^{1)}$	Property-class	5.8 [-]	1,50				
			8.8 [-]	1,50				
		Property-class	A4 [-]	1,87				
			C [-]	1,87				
Combined pullout and concrete failure								
Diameter for calculation	d_H [mm]	12	16	18	22	28		
Effective anchorage depth	h_{ef} [mm]	90	90	125	160	200		
Characteristic values in concrete C20/25. Intended use: dry and wet concrete								
Temperature range I (-40°C / +80°C) ³⁾	$N_{Rk,p}^0$ [kN]	30	40	50	75	115		
Temperature range II (-40°C / +120°C) ³⁾	$N_{Rk,p}^0$ [kN]	25	30	40	60	95		
Characteristic values in concrete C20/25. Intended use: flooded hole								
Temperature range I (-40°C / +80°C) ³⁾	$N_{Rk,p}^0$ [kN]	25	35	50	60	95		
Temperature range II (-40°C / +120°C) ³⁾	$N_{Rk,p}^0$ [kN]	20	25	35	50	75		
Increasing factors for $N_{Rk,p}^0$	Ψ_c	C25/30 [-]	1,05					
		C30/37 [-]	1,10					
		C35/45 [-]	1,15					
		C40/50 [-]	1,19					
		C45/55 [-]	1,22					
		C50/60 [-]	1,26					
Splitting failure								
Edge distance	$c_{cr,sp}$ [mm]	$h / h_{ef} \geq 2,0$	1,0 h_{ef}					
		$2,0 > h / h_{ef} > 1,3$	4,6 h_{ef} - 1,8 h					
		$h / h_{ef} \leq 1,3$	2,26 h_{ef}					
Spacing	$s_{cr,sp}$ [mm]	2 $c_{cr,sp}$						
Partial safety factor	$\gamma_{Mp} = \gamma_{Mc} = \gamma_{Msp}^{1)}$ [-]	1,8 ²⁾						

¹⁾ In absence of other national regulations.

²⁾ The partial safety factor $\gamma_2 = 1,2$ is included.

³⁾ See Annex 2

Injection system fischer FIS VT

Design of Bonded Anchors acc. to TR 029
fischer internal threaded anchors RG MI
Characteristic values to tension load

Annex 11

Table 11: Design of Bonded Anchors acc. to TR 029
Characteristic values to shear load for fischer internal threaded anchors RG MI

Size		M 8	M 10	M 12	M 16	M 20		
Steel failure without lever arm								
Characteristic resistance	$V_{Rk,s}$	Property	5.8 [kN]	9,2	14,5	21,1	39,2	62
		class	8.8 [kN]	14,6	23,2	33,7	62,7	90
		Property	A4 [kN]	12,8	20,3	29,5	54,8	86
		class 70	C [kN]	12,8	20,3	29,5	54,8	86
Partial safety factor	$\gamma_{Ms,V}$	Property	5.8 [-]	1,25				
		class	8.8 [-]	1,25			1,5	
		Property	A4 [-]	1,56				
		class 70	C [-]	1,56				
Steel failure with lever arm								
Characteristic bending moment	$M_{Rk,s}^0$	Property	5.8[Nm]	20	39	68	173	337
		class	8.8[Nm]	30	60	105	266	519
		Property	A4[Nm]	26	52	92	232	454
		class 70	C[Nm]	26	52	92	232	454
Partial safety factor	$\gamma_{Ms,V}$	Property	5.8 [-]	1,25				
		class	8.8 [-]	1,25				
		Property	A4 [-]	1,56				
		class 70	C [-]	1,56				
Concrete pryout failure								
Factor k in Equation (5.7) of Technical Report TR 029, Section 5.2.3.3		k [-]	2,0					
Partial safety factor		$\gamma_{Mcp}^{1)}$ [-]	1,5 ²⁾					
Concrete edge failure		See Technical Report TR 029, Section 5.2.3.4						
Partial safety factor		$\gamma_{Mc}^{1)}$ [-]	1,5 ²⁾					

¹⁾ In absence of other national regulations.

²⁾ The partial safety factor $\gamma_2 = 1,0$ is included.

Injection system fischer FIS VT

Design of Bonded Anchors acc. to TR 029
fischer internal threaded anchors RG MI
Characteristic values to shear load

Annex 12

Table 12: Displacement of internal threaded anchors RG MI to tension load

Size		M8	M10	M12	M16	M20
Temperature range I (-40°C / + 80°C)						
Tension load	N [kN]	11,9	13,8	19,8	29,8	69,4
Displacement	δ_{NO} [mm]	0,2	0,2	0,3	0,3	0,7
Displacement	$\delta_{N_{20}}$ [mm]	0,6	0,6	0,9	0,9	2,1
Temperature range II (-40°C / + 120°C)						
Tension load	N [kN]	9,9	11,9	15,8	23,8	37,7
Displacement	δ_{NO} [mm]	0,15	0,15	0,25	0,25	0,6
Displacement	$\delta_{N_{20}}$ [mm]	0,45	0,45	0,75	0,75	1,8

Table 13: Displacement of internal threaded anchors RG MI to shear load

Size		M8	M10	M12	M16	M20
Temperature range I -40°C / + 80°C and temperature range II -40°C / +120°C						
Shear load (property class 5.8)	V [kN]	5,1	8,1	11,8	21,9	34,2
Displacement	δ_{VO} [mm]	0,9	1,2	1,4	2,0	2,4
Displacement	$\delta_{V_{20}}$ [mm]	1,4	1,7	2,1	2,9	3,7
Shear load (property class 8.8)	V [kN]	7,0	11,1	16,2	30,1	47,0
Displacement	δ_{VO} [mm]	1,2	1,6	1,9	2,8	3,3
Displacement	$\delta_{V_{20}}$ [mm]	1,9	2,3	2,9	4,0	5,1
Shear load (property class A4-70)	V [kN]	5,9	9,3	13,5	25,2	39,3
Displacement	δ_{VO} [mm]	1,0	1,3	1,6	2,2	2,8
Displacement	$\delta_{V_{20}}$ [mm]	1,6	2,0	2,4	3,4	4,2
Shear load (property class C 70 ¹⁾)	V [kN]	7,3	11,6	16,9	31,4	49,0
Displacement	δ_{VO} [mm]	1,3	1,7	2,0	2,8	3,5
Displacement	$\delta_{V_{20}}$ [mm]	2,0	2,5	3,0	4,2	5,3

¹⁾ $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

Injection system fischer FIS VT

fischer internal threaded anchors RG MI
Displacements

Annex 13

Table 14: Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
Characteristic values to tension load for fischer anchor rods

Size		M 8	M 10	M 12	M 16	M 20	M 24	M 30		
Steel failure										
Characteristic resistance $N_{Rk,s}$	Property class	5.8 [kN]	19	29	43	79	123	177	281	
		8.8 [kN]	30	47	68	126	196	282	449	
	stainless steel A4 and steel C	Property class	50 [kN]	19	29	43	79	123	177	281
			70 [kN]	26	41	59	110	172	247	393
			80 [kN]	30	47	68	126	196	282	449
Partial safety factor $\gamma_{Ms,N}^{1)}$	Property class	5.8 [-]	1,50							
		8.8 [-]	1,50							
	stainless steel A4 and steel C	Property class	50 [-]	2,86						
			70 [-]	1,50 ³⁾ / 1,87						
			80 [-]	1,60						
Combined pullout and concrete cone failure										
Diameter of calculation	d [mm]	8	10	12	16	20	24	30		
Characteristic bond resistance in concrete C20/25. Intended use: dry and wet concrete										
Temperature range I ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	11,0	11,0	11,0	10,0	9,5	9,0	8,5		
Temperature range II ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	9,5	9,5	9,0	8,5	8,0	7,5	7,0		
Characteristic bond resistance in concrete C20/25. Intended use: flooded hole										
Temperature range I ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	—	—	9,5	8,5	8,0	7,5	7,0		
Temperature range II ⁴⁾	$\tau_{Rk,ucr}$ [N/mm ²]	—	—	7,5	7,0	6,5	6,0	6,0		
Factor for uncracked concrete	k_{ucr} [-]	10,1								
Increasing factors for $\tau_{Rk,ucr}$	Ψ_c	C25/30 [-]	1,05							
		C30/37 [-]	1,10							
		C35/45 [-]	1,15							
		C40/50 [-]	1,19							
		C45/55 [-]	1,22							
		C50/60 [-]	1,26							
Splitting failure										
Edge distance $c_{cr,sp}$ [mm]	$h / h_{ef} \geq 2,0$	1,0 h_{ef}								
	$2,0 > h / h_{ef} > 1,3$	4,6 h_{ef} - 1,8 h								
	$h / h_{ef} \leq 1,3$	2,26 h_{ef}								
Spacing	$s_{cr,sp}$ [mm]	2 $c_{cr,sp}$								
Partial safety factor	$\gamma_{Mp} = \gamma_{Mc} = \gamma_{Msp}^{1)}$ [-]	1,8 ²⁾								

¹⁾ In absence of other national regulations

²⁾ The partial safety factor $\gamma_2 = 1,2$ is included.

³⁾ For steel C: $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

⁴⁾ See Annex 2.

Displacements see Annex 10.

Injection system fischer FIS VT

Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
fischer anchor rods
Characteristic values to tension load

Annex 14

Table 15: Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
Characteristic values to shear load for fischer anchor rods

Size		M8	M10	M12	M16	M20	M24	M30		
Steel failure without lever arm										
Characteristic resistance $V_{Rk,s}$	Property	5.8 [kN]	9	15	21	39	61	89	141	
		class 8.8 [kN]	15	23	34	63	98	141	225	
	stainless steel A4 and steel C	Property	50 [kN]	9	15	21	39	61	89	141
			class 70 [kN]	13	20	30	55	86	124	197
		80 [kN]	15	23	34	63	98	141	225	
Steel failure with lever arm										
Characteristic bending moment $M_{Rk,s}^0$	Property	5.8 [Nm]	19	37	65	166	324	561	1124	
		class 8.8 [Nm]	30	60	105	266	519	898	1799	
	stainless steel A4 and steel C	Property	50 [Nm]	19	37	65	166	324	561	1124
			class 70 [Nm]	26	52	92	233	454	785	1574
		80 [Nm]	30	60	105	266	519	898	1799	
Ductility factor	k_2 [-]	0,8								
Partial safety factor steel failure										
$\gamma_{Ms,V}^{1)}$	Property	5.8 [-]	1,25							
		class 8.8 [-]	1,25							
	stainless steel A4 and steel C	Property	50 [-]	2,38						
			class 70 [-]	1,25 ³⁾ / 1,56						
		80 [-]	1,33							
Concrete pryout failure										
Factor in Equation (5.7) of CEN/TS 1992-4-5 Section 6.3.3	k_3 [-]	2,0								
Partial safety failure	$\gamma_{Mcp}^{1)}$ [-]	1,5 ²⁾								
Concrete edge failure										
Partial safety failure	$\gamma_{Mc}^{1)}$ [-]	1,5 ²⁾								

¹⁾ In absence of other national regulations.

²⁾ The partial safety factor $\gamma_2 = 1,0$ is included.

³⁾ For steel C: $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

Displacements see Annex 10.

Injection system fischer FIS VT

Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
fischer anchor rods
Characteristic values to shear load

Annex 15

Table 16: Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
Characteristic values to tension load for fischer internal threaded anchors RG MI

Size		M 8	M 10	M 12	M 16	M 20	
Steel failure							
Characteristic resistance with screw	$N_{Rk,s}$	Property-class 5.8 [kN]	19	29	43	79	123
		Property-class 8.8 [kN]	29	47	68	108	179
		Property-class A4 [kN]	26	41	59	110	172
		Property-class 70 C [kN]	26	41	59	110	172
Partial safety factor	$\gamma_{Ms,N}^{1)}$	Property-class 5.8 [-]	1,50				
		Property-class 8.8 [-]	1,50				
		Property-class A4 [-]	1,87				
		Property-class 70 C [-]	1,87				
Combined pullout and concrete failure							
Diameter for calculation	d_H [mm]	12	16	18	22	28	
Effective anchorage depth	h_{ef} [mm]	90	90	125	160	200	
Characteristic values in concrete C20/25. Intended use: dry and wet concrete							
Temperature range I (-40°C / +80°C) ³⁾	$N_{Rk,p}^0$ [kN]	30	40	50	75	115	
Temperature range II (-40°C / +120°C) ³⁾	$N_{Rk,p}^0$ [kN]	25	30	40	60	95	
Characteristic values in concrete C20/25. Intended use: flooded hole							
Temperature range I (-40°C / +80°C) ³⁾	$N_{Rk,p}^0$ [kN]	25	35	50	60	95	
Temperature range II (-40°C / +120°C) ³⁾	$N_{Rk,p}^0$ [kN]	20	25	35	50	75	
Factor for uncracked concrete	k_{ucr} [-]	10,1					
Increasing factors for $N_{Rk,p}^0$	Ψ_c	C25/30 [-]	1,05				
		C30/37 [-]	1,10				
		C35/45 [-]	1,15				
		C40/50 [-]	1,19				
		C45/55 [-]	1,22				
		C50/60 [-]	1,26				
Splitting failure							
Edge distance	$c_{cr,sp}$ [mm]	$h / h_{ef} \geq 2,0$	$1,0 h_{ef}$				
		$2,0 > h / h_{ef} > 1,3$	$4,6 h_{ef} - 1,8 h$				
		$h / h_{ef} \leq 1,3$	$2,26 h_{ef}$				
Spacing	$s_{cr,sp}$ [mm]	$2c_{cr,sp}$					
Partial safety factor	$\gamma_{Mp} = \gamma_{Mc} = \gamma_{Msp}^{1)}$ [-]	1,8 ²⁾					

¹⁾ In absence of other national regulations.

²⁾ The partial safety factor $\gamma_2 = 1,2$ is included.

³⁾ See Annex 2

Displacements see Annex 13.

Injection system fischer FIS VT

Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
fischer internal threaded anchors RG MI
Characteristic values to tension load

Annex 16

Table 17: Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
Characteristic values to shear load for fischer internal threaded anchors RG MI

Size		M 8	M 10	M 12	M 16	M 20		
Steel failure without lever arm								
Characteristic resistance	$V_{Rk,s}$	Property	5.8 [kN]	9,2	14,5	21,1	39,2	62
		class	8.8 [kN]	14,6	23,2	33,7	62,7	90
		Property	A4 [kN]	12,8	20,3	29,5	54,8	86
		class 70	C [kN]	12,8	20,3	29,5	54,8	86
Partial safety factor	$\gamma_{Ms,V}$	Property	5.8 [-]	1,25				
		class	8.8 [-]	1,25			1,5	
		Property	A4 [-]	1,56				
		class 70	C [-]	1,56				
Steel failure with lever arm								
Characteristic bending moment	$M_{Rk,s}^0$	Property	5.8[Nm]	20	39	68	173	337
		class	8.8[Nm]	30	60	105	266	519
		Property	A4[Nm]	26	52	92	232	454
		class 70	C[Nm]	26	52	92	232	454
Ductility factor		k_2 [-]	0,8					
Partial safety factor	$\gamma_{Ms,V}$	Property	5.8 [-]	1,25				
		class	8.8 [-]	1,25				
		Property	A4 [-]	1,56				
		class 70	C [-]	1,56				
Concrete pryout failure								
Factor in Equation (27) CEN/TS 1992-4-5, Section 6.3.3		k_3 [-]	2,0					
Partial safety factor		$\gamma_{Mcp}^{1)}$ [-]	1,5 ²⁾					
Concrete edge failure								
Partial safety factor		$\gamma_{Mc}^{1)}$ [-]	1,5 ²⁾					

¹⁾ In absence of other national regulations.

²⁾ The partial safety factor $\gamma_2 = 1,0$ is included.

Displacements see annex 13.

Injection system fischer FIS VT

Design of Bonded Anchors acc. to CEN/TS 1992-4-5: 2009
fischer internal threaded anchors RG MI
Characteristic values to shear load

Annex 17